

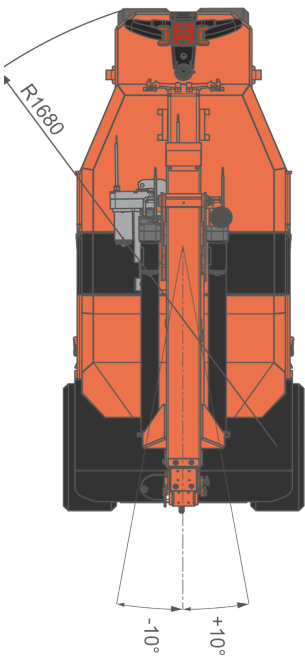
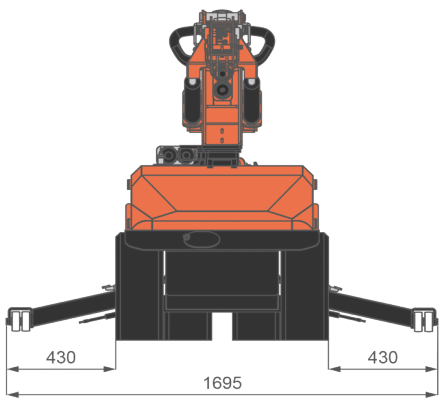


MPK06

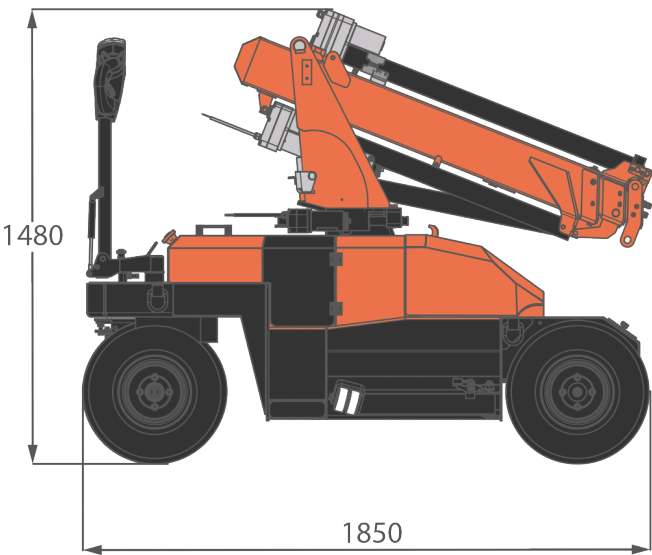

OUTDOOR WHEELS

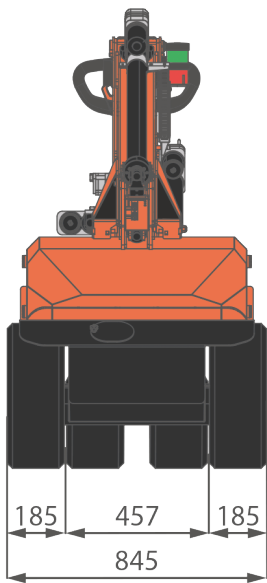

OVERALL INFORMATION

CRANE INFO	NAME	DESCRIPTION	U.M	VALUE
		OVERALL DIMENSIONS MPK06V	mm	Height
				1.360
				Length
			mm	1.850
				Width
				845
		OVERALL DIMENSIONS MPK06.2V	mm	Height
				1.480
				Length
			m	1.850
				Width
				845
		BOOM	m	Length
				1,2 - 2,8
			s	Speed
				31
		SLEWING	°	Angle
				-10°/10°
			rpm	Speed
				-
		LIFTING	°	Working Angle
				-21°/55°
			s	Speed
				-
		Max Capacity	kg	600
		Back Wheel Load Max	kg	265
		Front Wheel Load Max		750
		Travel Speed	km/h	3,6
		Gradeability †	°	13°
		Working Temperature	°C	-20°/+40°
		Lifting Class (UNI 4301-1)		


WEIGHTS		CRANE MPK06	All	kg	709*
		CRANE MPK06.M			724*
		COUNTERWEIGHT (INTO FRAME)	CW	kg	40
		COUNTERWEIGHT (INTO HOOD)	CW		151

ACCESSORIES		JIB	JIB-MPK06	kg	15
		MANIPULATOR	JVM06	kg	80
			JVM06EV	kg	110


ENGINE		ELECTRIC	Voltage	V	24
			Power	kW	3

MPK06V/06.2V - MAIN BOOM

with HOOK

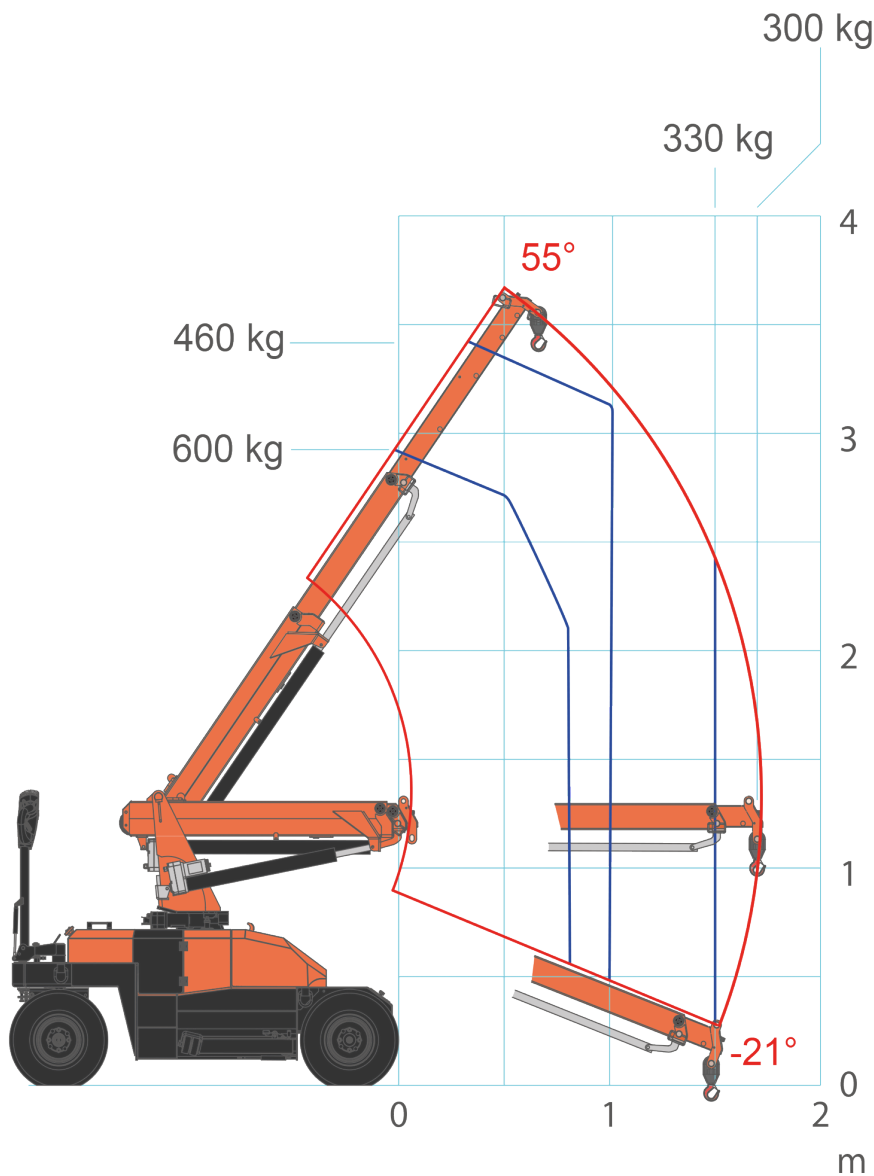


MPK06V/06.2V - JVM06/06EV

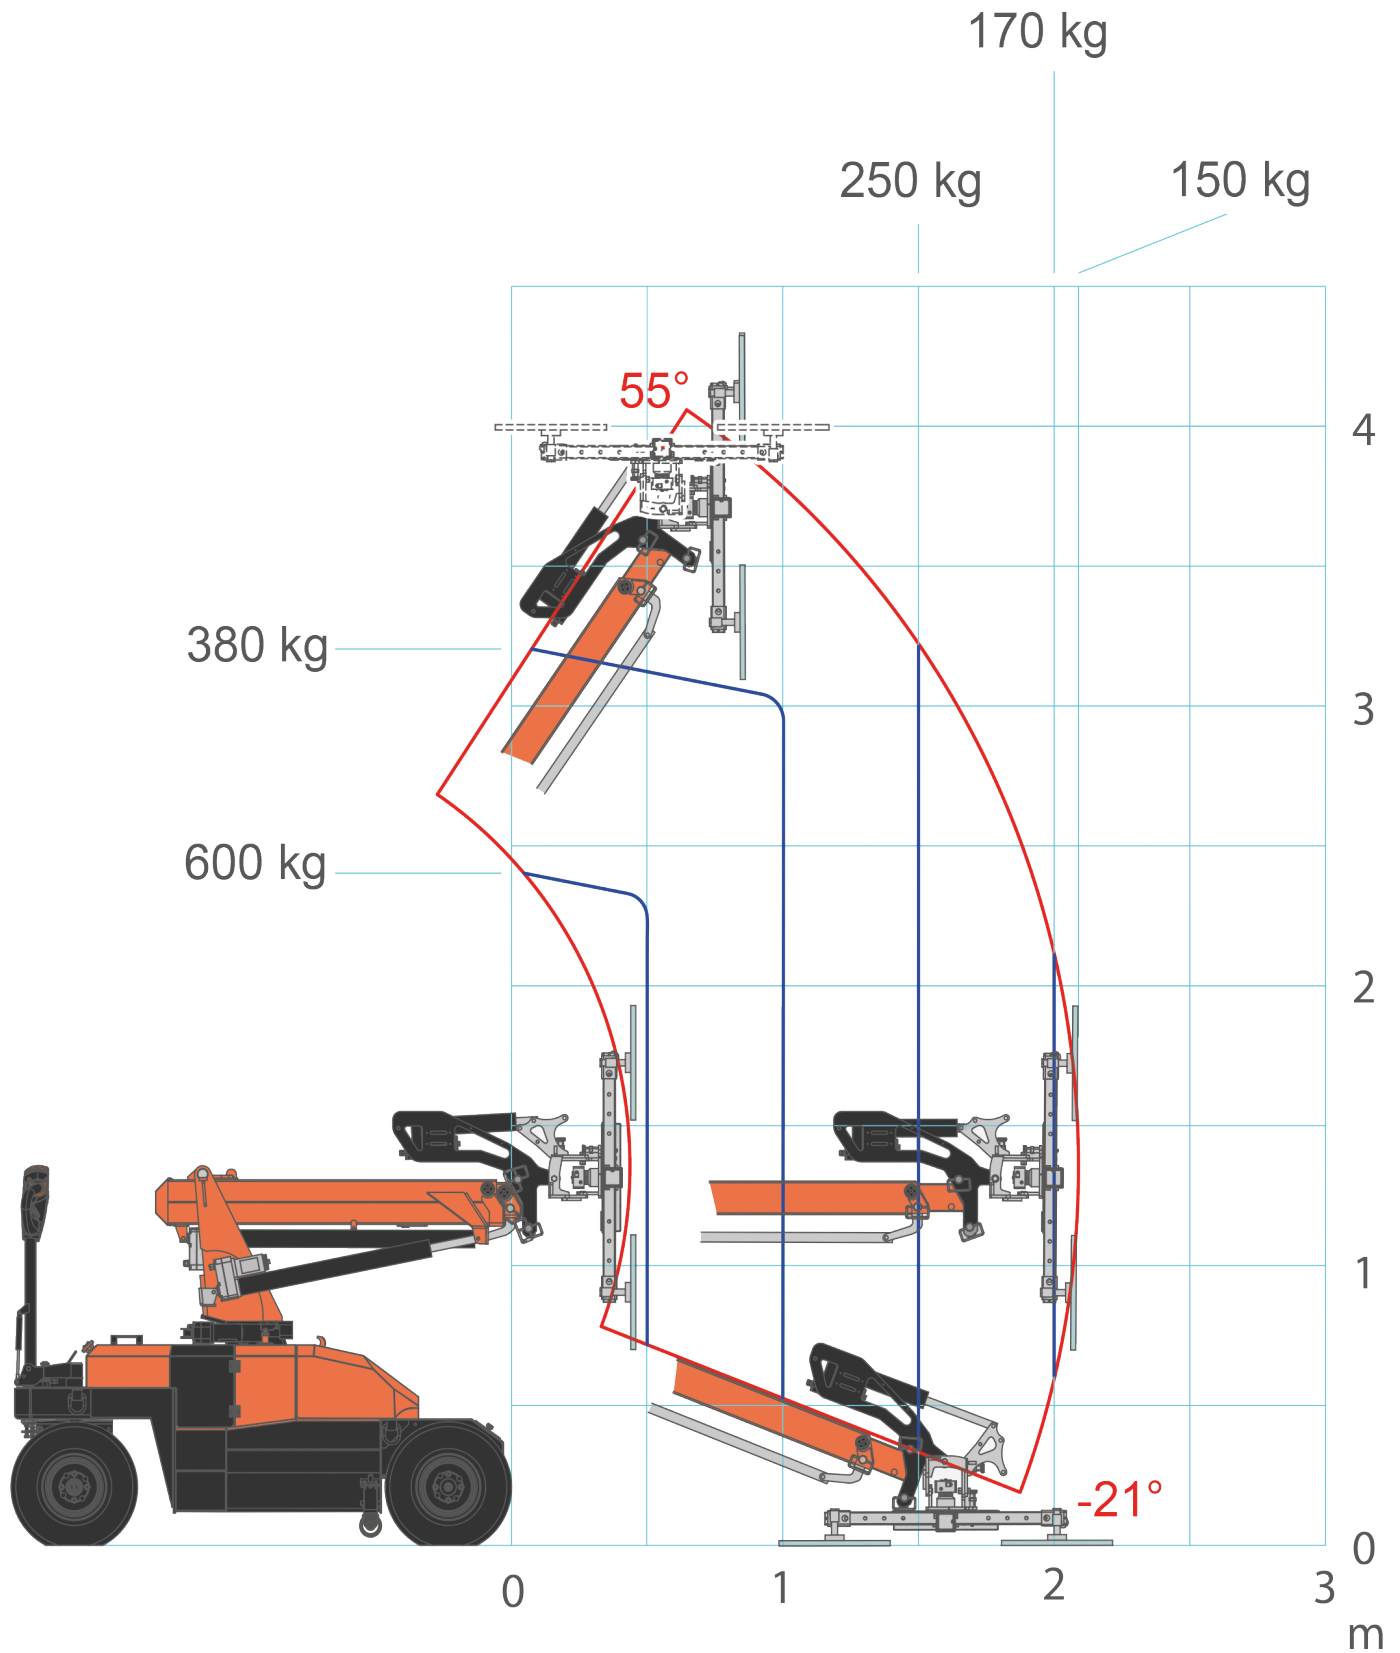


MPK06V/06.2V - JIBMPK06

with HOOK

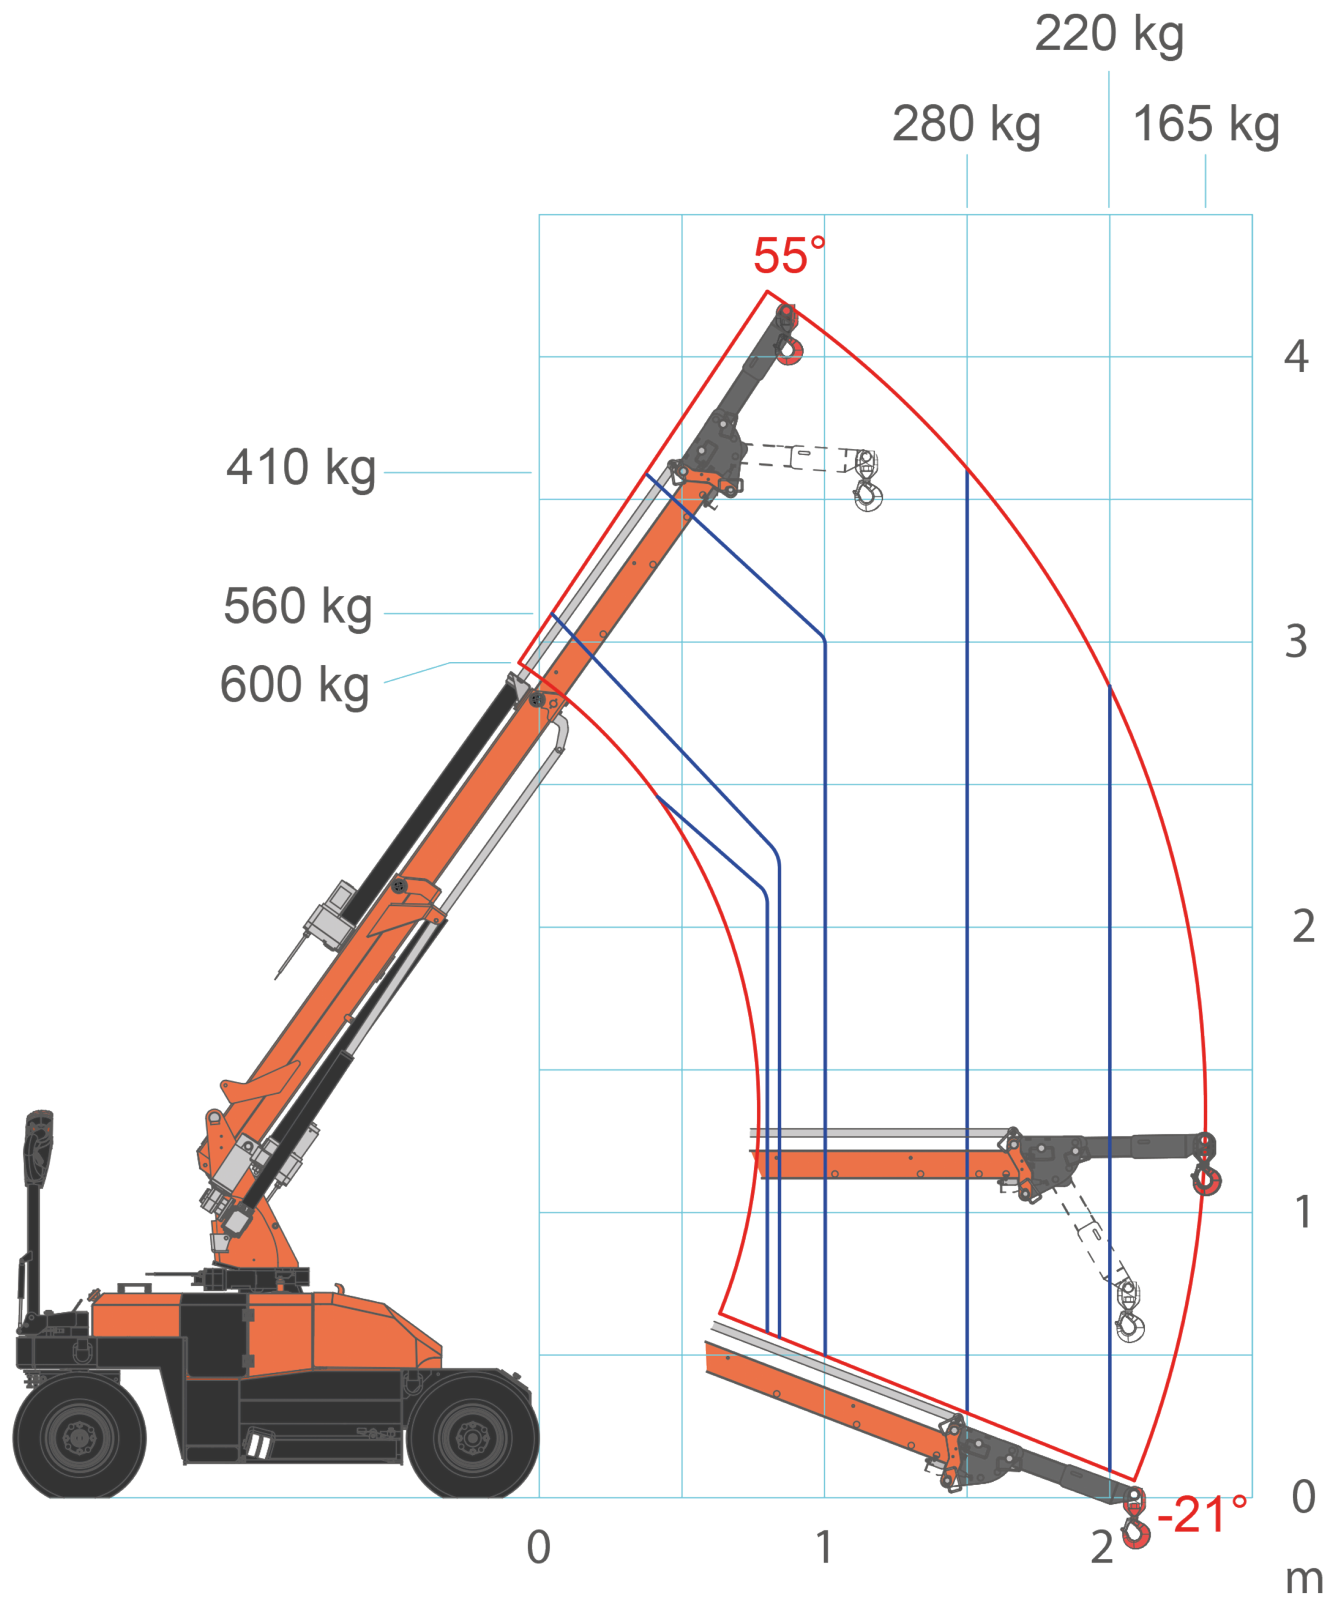


ACCESSORIES FEATURES

JVM06EV

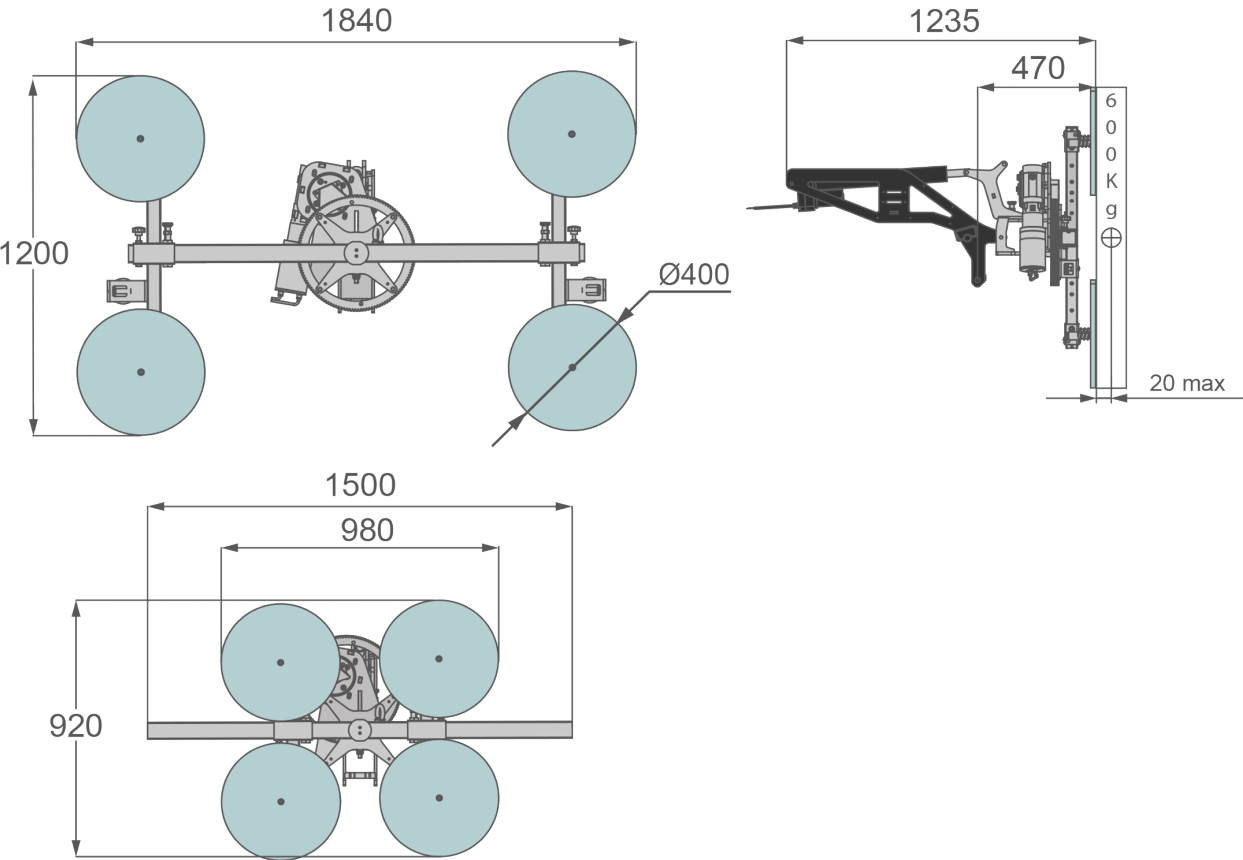


ACCESSORIES FEATURES
JVM06R CONFIGURATIONS

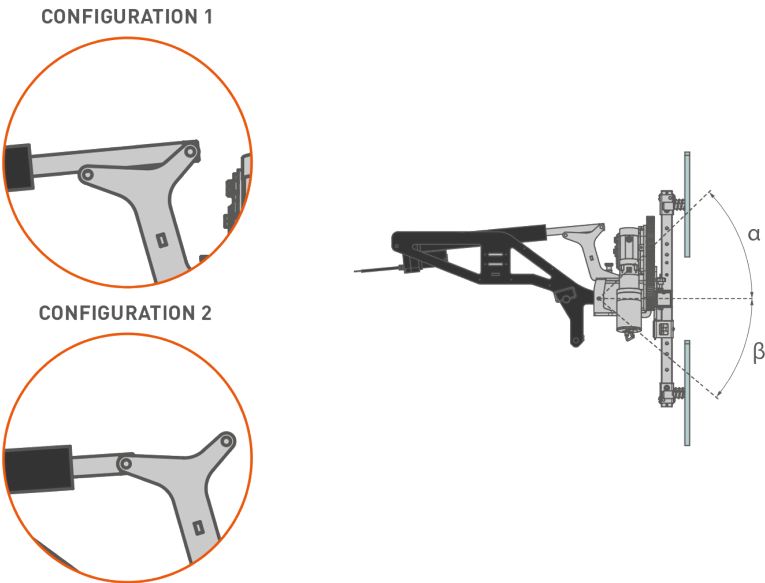

	α	β
1	40°	44°
2	14,5°	70°

[mm]

ACCESSORIES FEATURES
JIB MPK06

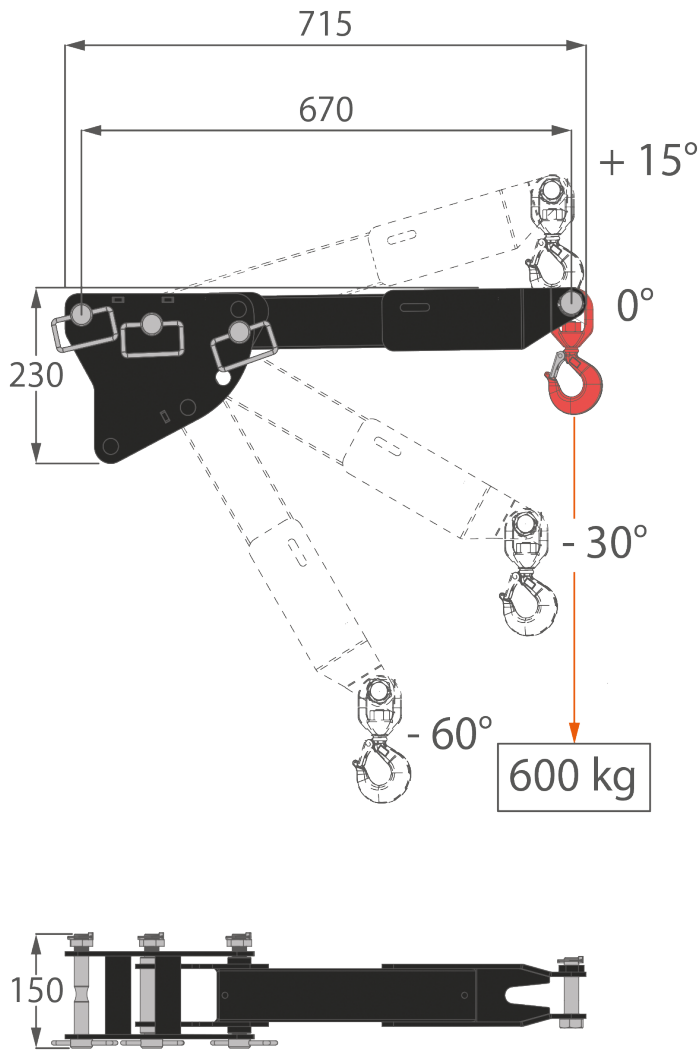

	JIB	JIB-MPK06	kg	15
---	-----	-----------	----	----

SYMBOLS

 Minipicker

 Travel Speed

 Gradeability

 Glass Manipulator

 Electric Engine

 Maximum Capacity

 Slewing

 Working Temperature

 Boom Angle

 Boom Length

 Jib

 Weight

 Back Wheel Loading Point

 Front Wheel Loading Point

Sicheres Heben auf engstem Raum.



Unitec Soest GmbH
Lange Wende 10
59494 Soest

Tel +49 2921 327 491-0
Mail info@unitec-soest.de